

SUPERLOCK KEYLATCH



SPECIFICATION
SHEET **BK**

- G** Made from stainless steel for ultimate outdoor durability!
- G** Simple key operated latch, slam the gate shut and open with the key
- G** Easy to fit – Slim 70mm (2 ¾") wide lock case along with adjustable and removable latchbolt ensure easy fitting to gates.
- G** Latchbolt is adjustable in length for precise fitting on site. Easy to rotate for left and right handed gates.
- G** Supplied with bolt support plate and gate post strike plate.



PRODUCT DETAILS

Product code:	Description:
BK1030	To fit flat bar and up to 30mm (1 ¼") box section
BK4060	To fit 40 to 60mm box section (1 ½" to 2 ¼")

Locking bolt: Adjustable, latch retracts 15mm (5/8").


Perfect for both left hand and right hand gates.

Comes with 3 keys.



INSTALLATION

- Drill 2 x 9mm (3/8") holes at 140mm (5 ½") centres for fixing bolts provided.
- Drill a second 18mm (¾") clearance hole for the latchbolt at 60mm (2 3/8") centres up from the bottom fixing hole.
- Hold the lock against the back of the box section and screw the latchbolt through the middle hole.
- Lock the latchbolt in place with the hex key supplied by inserting the hex key into the end of the latchbolt.
- Fix lock in place using the stainless steel bolt support plate and the countersunk screws provided. Ensure the latchbolt moves freely.
- Fix strike plate by either welding or screw fixing onto the gate post.
- MAINTENANCE:** Every 6 months, lubricate the latchbolt with light oil. Annually, dismantle the lock and spray mechanism with light oil.

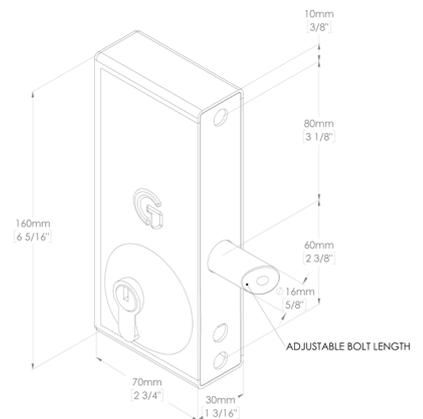

G GATEMASTER

VISIT GATEMASTERLOCKS.COM FOR MORE
INFORMATION